



Made in Germany

Elektrowerkzeuge®
Kress 

2012

THE KRESS RANGE
ELECTRIC POWER TOOLS



Your specialist dealer:

ALB Fasteners
Fixations

The professional way of fixing

Esserstraat 15
B-8550 Zwevegem

Tel 056771981

Info@alb.be

Fax 056771982

www.alb.be

Changes and errors subject to alterations.

GB 99 93 5090 - 12/06

Elektrowerkzeuge®
Kress 

KRESS-elektrik GmbH & Co. KG
Hechinger Str. 48
D-72406 Bisingen/Zollernalbkreis
Telefon +49 (0) 74 76/87 300
Telefax +49 (0) 74 76/87 191
e-mail: info@kress-elektrik.de

www.kress-elektrik.com



Content

■ BIPOWER DRILL AND CHISEL HAMMER SDS-PLUS	Page 6-7
■ DRILL AND CHISEL HAMMERS	Page
Survey	8
Demolition hammer	9
SDS-MAX	9
SDS-PLUS	10-11
■ DRILLS / DRYWALL SCREWDRIVERS	Page
Survey	12
Percussion drills	13
Drills	14
Power drill	15
Drywall screwdriver / screw magazine attachment	16-17
■ CORDLESS TOOLS	Page
18 V Cordless drywall screwdrivers	18-19
18 V Cordless drywall screwdrivers	20-21
14.4 V / 18 V 2-speed cordless screwdrivers	22-24
18 V Cordless tools Combos	26-27
10.8 V Cordless screwdriver / 14.4 V Cordless caulking gun	28-29
■ ANGLE GRINDERS	Page
Survey	30
Angle Grinders	31-32
■ WALL CHASER / SANDING TOOLS	Page
Wall chaser	34
Orbital sander / Eccentric grinder	35
■ SAWING / MILLING	Page
Survey	36
Reciprocating saw	37
Circular saw / Duo-saw	37
Pendulum jig saws	38
Milling motors	39
■ BLOWER / VACUUM CLEANER	Page
Wet and dry vacuum cleaner	40
Hot air blower	40
Klick-Box II professional carrying case system	41
■ ACCESSORIES	Page 42-48
■ PICTOGRAMS	Page 49-50



A strong family enterprise



"Since more than 80 years we are known by the professionals at the trade. In the third generation we continue to stand for powerful tools, outstanding quality and innovative technology – Made in Germany. You will keep on working in the best possible way with Kress tools. My name is the guarantor for this philosophy."

Dieter C. Kress

Service round the clock



Telephone hotline

Your direct connection to us! If you have any questions about tools, accessories or spare parts: our expert staff are available for you at all times. You can also get information quickly and round the clock on our website www.kress-elektrik.com or send your questions by e-mail to our customer service department.

Hotline: +49 (0) 74 76/8 74 50
e-mail: TKD@kress-elektrik.de



1. 80 years Kress:

By choosing Kress you decide on eight decades of experience and competence with power tools. A time in which we have enhanced our products and perfectly match the needs of our customers.



2. Made in Germany:

We produce our products in Germany. In this way we can guarantee the best possible quality, durability and highest precision.

3. Maximum customer orientation:

We attach great importance to your satisfaction. Therefore, we offer not only excellent products but also a comprehensive service.



4. Innovative solutions:

Creativity and innovation are key terms at Kress. As specialists we are always looking for new solutions to develop high-quality products to meet your requirements. Environmental friendliness of our products is a matter of course.

5. Best price/performance ratio:

Kress offers real added value at a good price performance ratio. Worldwide millions of satisfied customers in over 60 countries stand for this.

Training sessions

Knowledge for professionals. Our engineers and specialists offer regular training courses and seminars. Worldwide, geared to operating practice and in all areas of application. We will be pleased to provide you with detailed information on Kress tools.




Trade fairs

Our products are internationally available in more than 60 countries. At many trade fairs in Europe, Asia and America you can inform yourself about our company, our innovations and our products.



Customer service

Our customer service in Bisingen is available to you at all times. Service can be done either at your specialist dealer or directly at Kress. Repair jobs are done within 48 hours as a part of our fast and cost-efficient service. At Kress you only pay the actual repair costs.

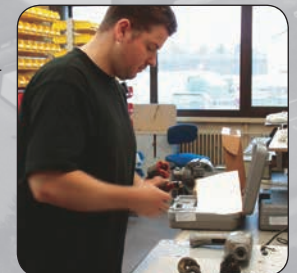

Ingenious equation:

Cordless + corded operation = 360 BPS BiPower




2 in 1



BiPower technology for maximum flexibility between cordless and corded operation



Cordless operation for unrestricted freedom of movement

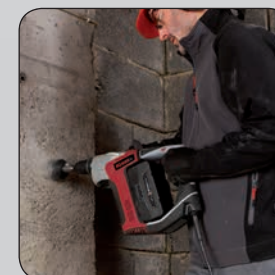

Corded operation for permanent operational readiness

2 years WARRANTY
Lithium Ion POWER TECHNOLOGY


The quantum leap

- **Cordless and corded operation** in one pneumatic hammer
- **Outstanding battery capacity** due to the wear-resistant brushless motor and 3.5 Ah battery capacity
- **Fastest drilling progress** through speed stabilisation and a mature impact mechanism technology
- **Lowest vibrations** through innovative damping system



The current charging condition can be seen at any time via the battery charge level indicator. To charge, simply plug in the power cord and continue working in the corded operation. During that time, the battery is charged with the help of the integrated charger.

- No loss of time
- No external charger needed
- No second battery required!

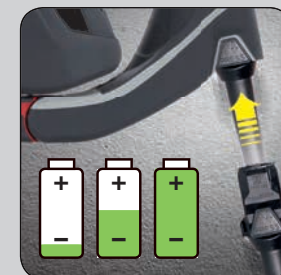

360 BPS BiPower 36 Volt

- QuiXS Quick change drill chuck system
- Control electronics guarantee constant speed even under load
- Magnesium die cast gear housing for a long service life
- Rotation stop for easy chiselling operations
- Hammer action stop for normal drilling and screwing operations
- Safety friction clutch protects the user
- Scope of delivery 1 x 36 V / 3.5 Ah Li-Ion battery, 2-component anti-vibration handle with drill depth stop, 4 m rubber mains cable with patented quick-action lock, lubricant for drills and chisels, professional Klick-Box II carrying case (page 41)

Art.-No.: 12 06 0501

Available as an accessory: ALK 360 battery and charger kit in the professional Klick-Box II carrying case consisting of: Universal charger USL 360 Li (14.4-36 volt) and 1 x 36 V/3.5 Ah Li-Ion battery

Art.-No.: 98 04 4501

V/Ah	1/min	Joule	Joule	mm	mm	mm	mm	min	kg	m
Li-Ion 36/3,5	0...850	2,9*	2,9*	26	68	30	13	45	4,9	4

* measured according to EPTA 05/2009

The construction site professionals

Pneumatic hammers for highest demand



Operation
The QuiXS changing system makes it possible to switch with a turn of the hand from the SDS-plus holder to the quick-release chuck.



The damping system
The hand grip is each connected with the motor gear unit by a stable active-damping part. This means that any vibrations and impacts can be absorbed and neutralised.



More precision - prolonged service life: The solid metal housing
The motor-gear connection consists of a robust distortion-free metal housing. Thereby a good heat abstraction and a precise axle guidance is given. As a result an extremely long service life is reached compared with the traditional tools. Especially, the professional craftsmen count on performance, precision and reliability.

Demolition hammer 30 mm hexagonal recess

1300 ABH 1300 Watt

- Powerful demolition hammer with high removal rate
- Aluminium die-cast gearbox ensures longevity
- Keyless chisel fixture ensures a fast and convenient tool change
- Additional handle can be swivelled by up to 360° for an optimal working attitude
- **Scope of delivery:** additional handle, pointed chisel 410 mm, lubrication oil 70 ml, 2 hexagon keys (5 and 6 mm) for after-sales service, 24 mm installation wrench for oil basin, 2 carbon brushes, professional carrying case

Joule	kg	m
40	15,0	3,5



Art.-No.: 04 28 3902

Chisel hammer SDS-MAX

1100 MH-MAX 1100 Watt

- Active damping system in the grip area
- Control electronics for precise chisel performance
- Lockable control switch for continuous operation
- **Scope of delivery:** vibration-free additional hand grip, lubricant for drill and chisel, professional carrying case

Joule	kg	m
12	5,6	4



Art.-No.: 04 28 4101

Drill and chisel hammers SDS-MAX

1100 KH-MAX 1100 Watt

- Active damping system in the grip area
- Control electronics for sensitive initial drilling and precise chisel performance
- Rotation stop for heavy chiselling operations
- Safety friction clutch
- **Scope of delivery:** vibration-free additional hand grip, lubricant for drill and chisel, professional carrying case

RPM	Joule	Joule	mm	mm	kg	m
0...600	10	10	45	125	5,9	4



Art.-No.: 04 28 4001

1100 BMH-MAX 1100 Watt

- Vibration damping system - fully damped
- Control electronics with speed resp. number of impacts pre-selection
- Rotation stop for heavy chiselling operations
- Safety friction clutch
- Service display gives notice of the upcoming carbon brush change
- **Scope of delivery:** anti-vibration additional hand grip with drilling depth gauge, lubricant for drill and chisel, professional carrying case

RPM	Joule	Joule	mm	mm	kg	m
235...500	7,5*	7,5*	40	105	5,9	4



Art.-No.: 04 28 4601

* measured according to EPTA 05/2009

800 PSE 800 Watt

- Rotation stop for easy chiselling operations
- Control electronics for sensitive initial drilling
- Safety friction clutch
- Hammer stop for normal drilling and screwing
- **Scope of delivery: 2-component soft handle with drill depth stop, lubricant for drills and chisels, professional Klick-Box II carrying case (page 41)**



0...1000	2,8*	2,8*	26	68	40	13	X	2,9	4

Art.-No.: 04 28 4201

700 PSE 700 Watt

- Rotation stop for easy chiselling operations
- Control electronics for sensitive initial drilling
- Safety friction clutch
- Hammer stop for normal drilling and screwing
- **Scope of delivery: 2-component soft handle with drill depth stop, lubricant for drills and chisels, professional Klick-Box II carrying case (page 41)**



0...1050	2,3*	2,3*	24	68	30	13	X	2,7	4

Art.-No.: 04 28 2649

800 PSE-QUIXS SET 800 Watt

- QuiXS changing system
- Rotation stop with spindle lock for easy chiselling operations
- Control electronics for sensitive initial drilling
- Safety friction clutch
- Hammer stop for normal drilling
- **Scope of delivery: QuiXS quick-release chuck Ø 13 mm, 2-component soft handle with drill depth stop, lubricant for drills and chisels, professional Klick-Box II carrying case**



0...1000	2,8*	2,8*	26	68	40	13	X	3,0	4

Art.-No.: 04 28 4502

700 PEC 700 Watt

- Rotation stop for easy chiselling operations
- Control electronics for sensitive initial drilling
- Safety friction clutch
- Hammer stop for normal drilling and screwing
- **Scope of delivery: 2-component soft handle with drill depth stop, lubricant for drills and chisels, professional carrying case**



0...1170	2,3*	2,3*	24	68	30	13	X	2,6	4

Art.-No.: 04 28 2334

800 PPE 800 Watt

- Rotation stop for easy chiselling operations
- Control electronics for sensitive pre-drilling
- Safety friction clutch
- Hammer action stop for normal drilling and screwing operations
- **Scope of delivery: 2-component soft handle with drill depth stop, professional Klick-Box II carrying case (page 41)**



Available as of May 2012

0...1050	2,8	2,8	26	68	40	13	X	2,6	4

Art.-No.: 04 28 4201

* measured according to EPTA 05/2009

550 HMSL 550 Watt

- Low weight enables a fatigue-free working
- Magnesium metal gear casing
- Thermal touch protection
- Control electronics for soft start-up
- Safety friction clutch
- Hammer stop for normal drilling and screwing
- **Scope of delivery: 2-component soft handle with drill depth stop, lubricant for drills, professional Klick-Box II carrying case (page 41)**

1,8* J at only 1,7 kg



0...1450	1,8*	18	25	13	X	1,7	4

Art.-No.: 04 28 4401

* measured according to EPTA 05/2009

Technology to meet highest requirements

850 SB-2: As powerful as a pneumatic hammer with the versatility of a percussion drill



Safety and longevity
The aluminium die-cast gearbox with thermal touch protection ensures an optimal heat release and long lifetime.



Precise working
Due to the full-wave electronics with speed pre-selection, 2-speed gear and soft start-up various materials can be worked on optimally.



Operation
The Kress ergonomics concept for extended fatigue-free work: all-over 2-component soft handle and rubberised trigger switch.

850 SB-2 850 Watt

- 2-speed gearbox with high torque in the 1st gear for drilling and hammering with large drilling Ø, high speed in the 2nd gear for drilling and hammering with small drilling Ø
- Aluminium die-cast gearbox with thermal touch protection
- Full wave electronics with speed pre-selection
- 13 mm impact-resistant metal quick-release chuck
- Safety friction clutch
- Scope of delivery: 2-component soft hand grip with drilling depth gauge, professional Klick-Box II carrying case (page 41)



0...1250	0...3000	48000	20	40	13	X	2,3	4

Art.-No.: 04 19 0101

650 SBLR-1 650 Watt

- 13 mm impact-resistant quick-release chuck
- Control electronics and speed pre-selection
- Scope of delivery: 2-component soft hand grip with drilling depth gauge, professional Klick-Box I carrying case



0...3500	56000	16	30	13	X	1,7	4

Art.-No.: 04 09 0410

550 SBLR-1 550 Watt

- 13 mm impact-resistant quick-release chuck
- Control electronics
- Scope of delivery: 2-component soft hand grip with drilling depth gauge, professional Klick-Box I carrying case



0...3300	52800	13	25	10	X	1,7	4

Art.-No.: 04 10 0610

850 BM-2 850 Watt

- 2-speed gear with high torque in the 1st gear for screwing and high speed in the 2nd gear for drilling
- QuiXS rapid chuck changing system
- Direct support of the screwdriver bit in the spindle
- Full wave electronics with speed pre-selection
- Aluminium die-cast gearbox with thermal touch protection
- Safety friction clutch
- **Scope of delivery:** 2-component soft hand grip with drilling depth gauge, professional Klick-Box II carrying case (page 41)



0...1250	0...3000	8	40	13	30	X	2,3	4

Art.-No.: 04 20 0101

650 BS QUIXS 650 Watt

- QuiXS rapid chuck changing system
- Direct support of the screwdriver bit in the spindle
- Low weight and small dimensions
- Full wave electronics
- Aluminium die-cast gearbox
- **Scope of delivery:** 13 mm QuiXS quick-release chuck, professional Klick-Box I carrying case



0...3200	6	30	10	10	X	1,7	4

Art.-No.: 04 18 0111

500 BS 500 Watt

- Low weight and small dimensions
- Full wave electronics
- 10 mm quick-release chuck



0...3000	16	10	5	X	1,2	4

Art.-No.: 04 05 0312

1055 HTC 1050 Watt

- Heavy-duty drill with high torque (up to 110 Nm*)
- Torque control for individual torque settings
- 3-fold gear reduction
- Full wave control electronics with tacho generator and speed pre-selection
- 13 mm quick-release chuck
- **Scope of delivery:** extended 2-component soft hand grip with drilling depth gauge, professional carrying case



70...530	70	16	110*	X	2,3	4

*Blocking moment

Art.-No.: 04 14 0206

650 TBS 6000 650 Watt

- Robust drywall screwdriver with very high speed for all assembly works in the dry construction
- Full wave electronics
- Aluminium die-cast gearbox
- Silent jaw clutch for automatic switch-off when achieving the screw depth
- Removable drilling depth gauge with notch positions for serial screwing
- Compatible with SMV QuiXS screw magazine attachment
- **Scope of delivery: depth gauge for screws with head diameter of max. 8.5 mm, belt hook, bit holder, PH 2 screwdriver bit**

0...6000	5	10	1,5	6



Art.-No.: 04 18 0401

650 TBS 4500 650 Watt

- Robust drywall screwdriver with very high speed for all assembly works in the dry construction
- Full wave electronics
- Aluminium die-cast gearbox
- Silent jaw clutch for automatic switch-off when achieving the screw depth
- Removable drilling depth gauge with notch positions for serial screwing
- Compatible with SMV QuiXS screw magazine attachment
- **Scope of delivery: depth gauge for screws with head diameter of max. 8.5 mm, belt hook, bit holder, PH 2 screwdriver bit**

0...4500	5	12	1,5	6



Art.-No.: 04 18 0301

650 TBS 2500 650 Watt

- Robust drywall screwdriver with high torque for facade construction and interior construction jobs
- Full wave electronics
- Aluminium die-cast gearbox
- Silent jaw clutch for automatic switch-off when achieving the screw depth
- Removable drilling depth gauge with notch positions for serial screwing
- Compatible with SMV QuiXS screw magazine attachment
- **Scope of delivery: depth gauge for screws with head diameter of max. 8.5 mm/12.5 mm/15 mm, belt hook, bit holder, PH 2 screwdriver bit**

0...2500	6	20	1,5	6



Art.-No.: 04 18 0201

505 TBS 500 Watt

- Compact drywall screwdriver with high speed
- Full wave electronics
- Silent jaw clutch for automatic switch-off when achieving the screw depth
- Removable drilling depth gauge with notch positions for serial screwings
- Compatible with SMV QuiXS screw magazine attachment
- **Scope of delivery: depth gauge until max. ø 8,5 mm, belt hook, bit holder, PH 2 screwdriver bit**

0...4650	5	3,2	1,1	4



Art.-No.: 04 05 0507

500 TBS 500 Watt

- Compact all-purpose drywall screwdriver
- Full wave electronics
- Silent jaw clutch for automatic switch-off when achieving the screw depth
- Removable drilling depth gauge with notch positions for serial screwings
- Compatible with SMV QuiXS screw magazine attachment
- **Scope of delivery: depth gauge until max. ø 8,5 mm, belt hook, bit holder, PH 2 screwdriver bit**

0...3000	6	5	1,1	4



Art.-No.: 04 05 0411

Screw magazine attachment

SMV QUIXS

- QuiXS changing system for lightning and keyless change between standard depth gauge and screw magazine attachment
- High-efficient serial screwing with belted screws
- Fast and keyless adjustment of the immersion depth
- Fast and keyless adjustment of the screw depth via a scale
- **Scope of delivery: 2 PH 2 drill bits, long**

10	20-55	3,5-4,2	≤ 8 mm	0,5



Art.-No.: 98 04 3901

The SMV QuiXS can be used with all Kress drywall screwdrivers



Universal use in dry construction

Small and well-designed but a strong performance

No one is smaller!



Up to 1340 screws or 125 qm drywall construction surface with just one battery charge.

Compatible with SMV QuiXS screw magazine attachment

The screw magazine attachment ensures highest efficiency and exact working results, also at difficult working positions.

Universal use

For all standard dry wall screws and materials.



Always keep on hand

No matter where you are and what you are doing: due to the belt hook with integrated bit holder your tool and the reserve bits – with or without SMV QuiXS – are always available.



180 ATBS 1,5/3,0 18 Volt

- The smallest, most compact and most lightweight cordless drywall screwdriver world-wide
- Maximum power for tough long-term work and serial screwings
- Silent clutch for automatic switch-off when achieving the screw depth
- Removable depth gauge with notch positions for serial screwings
- Highly luminous LED and battery capacity display in the battery
- Compatible with SMV QuiXS screw magazine attachment
- Scope of delivery: depth gauge for screws with head diameter of max. 8,5 mm, 2 batteries (1 x 18 V/1,5 Ah battery, 1 x 18 V/3,0 Ah battery), CSL 30 LI fast charger with cable depot, magnetic bit holder with PH 2 screwdriver bit, belt hook with integrated bit holder, professional Klick-Box II carrying case (page 41)



V/Ah	min	max. Nm	1/min	ø mm		kg	
Li-Ion 18/1,5/3,0	1 x 1,5 Ah 1 x 3,0 Ah	15 30	8,5	0...4200	5	X	1,3 1,6

Art.-No.: 12 40 0101

180 ATBS 3,0 SMV 18 Volt

Scope of delivery: same as 180 ATBS 1,5/3,0 besides: 2 x 3.0 Ah batteries (instead of 1 x 1.5 Ah and 1 x 3.0 Ah), 1 SMV QuiXS screw magazine attachment (incl. 2 PH 2 long bits)



V/Ah	min	max. Nm	1/min	ø mm		kg	
Li-Ion 18/3,0	2 x 3,0 Ah	30	8,5	0...4200	5	X	1,6/2,0

Art.-No.: 12 40 0201


180 ATBS basic

Delivery in a carton box with depth stop for screws with a head diameter up to 8.5 mm, magnetic bit holder with PH screw bit, size 2, belt hook with integrated bit holder, without battery and charger



Impressive arguments for more performance

Powerful, compact and lightweight

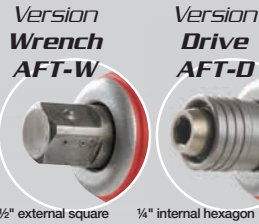

Tangential force ensures blow-back proof at high torque.

Compact 1.5 Ah series



Handy and tidy
Belt hook with integrated bit holder provides an easy carrying both of the tool and the bits at the belt.



Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY

Power of your own choice
3,0 Ah or 1,5 Ah, the batteries offer a flexible performance for the tools of the cordless family (AFT, AFB and ATBS)

180 AFT-W 18 Volt

- 1/2" external square (Wrench)
- Tangential force ensures blow-back proof at high torque
- Robust aluminium die-cast gear housing
- Quick stop for flush screwing
- Bright LED and battery capacity display

Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY



180 AFT-W 3.0

- Scope of delivery: 2 x 3.0 Ah batteries, CSL 30 LI quick charger with cable depot, belt hook with integrated bit holder, professional Klick-Box II carrying case (page 41)

V/Ah	min	max. Nm	1/min	ømm	ømm	ømm		kg	
Li-Ion 18 / 3,0	2 x 3,0 Ah	30	230 / 155	0...3200	7,5	M6-M12	12	X	1,7

Art.-No.: 12 39 0201

180 AFT-W 1.5

- Scope of delivery: 2 x 1,5 Ah batteries, CSL 30 LI quick charger with cable depot, professional Klick-Box I carrying case

V/Ah	min	max. Nm	1/min	ømm	ømm	ømm		kg	
Li-Ion 18 / 1,5	2 x 1,5 Ah	15	230 / 155	0...3200	7,5	M6-M12	12	X	1,4

Art.-No.: 12 39 0301

180 AFT-W basic **NEW**

- Delivery in a carton box incl. belt hook with integrated bit holder, without battery and charger

Art.-No.: 12 39 0208

180 AFT-D 18 Volt

- 1/4" internal hexagon (Drive)
- Tangential force ensures blow-back proof at high torque
- Robust aluminium die-cast gear housing
- Quick stop for flush screwing
- Bright LED and battery capacity display

Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY



180 AFT-D 3.0

- Scope of delivery: 2 x 3.0 Ah batteries, CSL 30 LI quick charger with cable depot, belt hook with integrated bit holder, professional Klick-Box II carrying case (page 41)

V/Ah	min	max. Nm	1/min	ømm	ømm	ømm		kg	
Li-Ion 18 / 3,0	2 x 3,0 Ah	30	160 / 140	0...3200	7,5	M6-M12	12	X	1,7

Art.-No.: 12 38 0201

180 AFT-D 1.5

- Scope of delivery: 2 x 1,5 Ah batteries, CSL 30 LI quick charger with cable depot, professional Klick-Box I carrying case

V/Ah	min	max. Nm	1/min	ømm	ømm	ømm		kg	
Li-Ion 18 / 1,5	2 x 1,5 Ah	15	160 / 140	0...3200	7,5	M6-M12	12	X	1,4

Art.-No.: 12 38 0301

180 AFT-D basic **NEW**

- Delivery in a carton box incl. belt hook with integrated bit holder, without battery and charger

Small power packs

Flexible working in every corner due to the QuiXS-system



2 years WARRANTY
Lithium Ion
POWER TECHNOLOGY

if
product design award
2010



Handy and tidy
Belt hook with integrated bit holder provides an easy carrying both of the tool and the bits at the belt.



QUIXS
QuiXS rapid chuck changing system, for lightning chuck changing, for screwing without a chuck due to the direct support of the screwdriver bit in the spindle or for the use of a QuiXS attachment.



QUIXS angle drilling head
For using the tool as an angle screwdriver. The angle drilling head can be turned through 360° and can thus be adapted to every working position.

180 AFB 3,0 18 Volt

- 2-speed gear with high torque in the 1st gear for screwing and high speed in the 2nd gear for drilling
- QuiXS rapid chuck changing system
- Direct support of the screwdriver bit in the spindle
- 21-stage torque setting
- Long service life due to an intelligent overload protection
- Highly luminous LED and battery capacity display
- **Scope of delivery:** 13 mm QuiXS quick-release chuck, 2 x 3.0 Ah batteries, CSL 30 LI quick charger with cable depot, PH 2 screwdriver bit, belt hook with integrated bit holder, gear protection cap, professional Klick-Box II carrying case (page 41)



V/Ah	2 x 3,0 Ah	min	max. Nm	0... 360 0...1500	45	13	12	X	kg
Li-Ion	18 / 3,0	30	60 / 40						1,7/2,0

Art.-No.: 12 31 0210

180 AFB 3,0 SET II 18 Volt

- **Scope of delivery:** see 180 AFB 3.0, plus QuiXS socket wrench attachment 1/2" external square and QuiXS angle attachment



Art.-No.: 12 31 0222

180 AFB 1,5 18 Volt

- 2-speed gear with high torque in the 1st gear for screwing and high speed in the 2nd gear for drilling
- QuiXS rapid chuck changing system
- Direct support of the screwdriver bit in the spindle
- 21-stage torque setting
- Long service life due to an intelligent overload protection
- Highly luminous LED and battery capacity display
- **Scope of delivery:** 13 mm QuiXS quick-release chuck, 2 x 1.5 Ah batteries, CSL 30 LI quick charger with cable depot, gear protection cap, professional Klick-Box I carrying case



V/Ah	2 x 1,5 Ah	15	60 / 40	0... 360 0...1500	45	13	12	X	kg
Li-Ion	18 / 1,5								1,4/1,7

Art.-No.: 12 30 0201

180 AFB 1,5 SET II 18 Volt

- **Scope of delivery:** see 180 AFB 1.5, plus QuiXS socket wrench attachment 1/2" external square and QuiXS angle attachment



Art.-No.: 12 30 0208

180 AFB basic

- Delivery in a carton box incl. belt hook with integrated bit holder, without battery and charger



Art.-No.: 12 30 0204

144 AFB 3,0 14,4 Volt

- 2-speed gear with high torque in the 1st gear for screwing, high speed in the 2nd gear for drilling
- QuiXS rapid chuck changing system
- Direct support of the screwdriver bit in the spindle
- 21-stage torque setting
- Quick stop for flush screwing
- Highly-luminous LED and battery capacity display
- **Scope of delivery: 13 mm QuiXS quick-release chuck, 2 x 3.0 Ah batteries, CSL 30 LI quick charger with cable depot, PH 2 screwdriver bit, belt hook with integrated bit holder, gear protection cap, professional Klick-Box II carrying case (page 41)**



V / Ah		min	max. Nm	mm	mm	mm		kg
Li-Ion 14,4/3,0	2 x 3,0 Ah	30	55 / 35	38	13	10	X	1,6/1,9

Art.-No.: 12 31 0109

144 AFB 3,0 SET II 14,4 Volt

- **Scope of delivery: see 144 AFB 3.0, plus QuiXS socket wrench attachment 1/2" external square and QuiXS-angle attachment**



Art.-No.: 12 31 0118

144 AFB 1,5 14,4 Volt

- 2-speed gear with high torque in the 1st gear for screwing, high speed in the 2nd gear for drilling
- QuiXS rapid chuck changing system
- Direct support of the screwdriver bit in the spindle
- 21-stage torque setting
- Quick stop for flush screwing
- Highly-luminous LED and battery capacity display
- **Scope of delivery: 13 mm QuiXS quick-release chuck, 2 x 1,5 Ah batteries, CSL 30 LI quick charger with cable depot, gear protection cap, professional Klick-Box I carrying case**



V / Ah		min	max. Nm	mm	mm	mm		kg
Li-Ion 14,4/1,5	2 x 1,5 Ah	15	55 / 35	38	13	10	X	1,3/1,6

Art.-No.: 12 30 0101

144 AFB 1,5 SET II 14,4 Volt

- **Scope of delivery: see 144 AFB 1.5, plus QuiXS socket wrench attachment 1/2" external square and QuiXS-angle attachment**



Art.-No.: 12 30 0110

144 AFB basic

- **Delivery in a carton box incl. belt hook with integrated bit holder, without battery and charger**



Art.-No.: 12 31 0121



Double Power

Customised combinations for your applications

NEW



Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY

Illustration exemplarily

Cordless screwdriver + cordless drywall screwdriver

180 AFB/ATBS 3,0/1,5 COMBO

→ 2-speed cordless screwdriver 180 AFB



180 AFB

see page 23

Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY



→ Cordless drywall screwdriver 180 ATBS



180 ATBS

see page 19

– Scope of delivery: 180 AFB, 180 ATBS, 13 mm QuiXS quick-release chuck, depth stop for screws with a head diameter up to 8.5 mm, 1 x 3.0 Ah battery for maximum range and 1 x 1.5 Ah battery for lowest weight – fits for both tools, CSL 30 LI quick charger with cable depot, PH 2 screwdriver bit, belt hook with integrated bit holder, gear protection cap, professional Klick-Box II carrying case (page 41)

Art.-No.: 12 31 0226

Cordless screwdriver + cordless impact drill

180 AFB/AFT-W 3,0/1,5 COMBO

→ 2-speed cordless screwdriver 180 AFB



180 AFB

see page 23

Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY



→ Cordless impact drill 180 AFT-W



Wrench



1/2" external square

180 AFT-W

see page 21

– Scope of delivery: 180 AFB, 180 AFT-W, 13 mm QuiXS quick-release chuck, 1 x 3.0 Ah battery for maximum range and 1 x 1.5 Ah battery for lowest weight – fits for both tools, CSL 30 LI quick charger with cable depot, belt hook with integrated bit holder, gear protection cap, professional Klick-Box II carrying case (page 41)

Art.-No.: 12 31 0220

180 AFB/AFT-D 3,0/1,5 COMBO

→ 2-speed cordless screwdriver 180 AFB



180 AFB

see page 23

Lithium Ion
POWER TECHNOLOGY
2 years WARRANTY



→ Cordless impact drill 180 AFT-D



Drive



1/4" internal hexagon

180 AFT-D

see page 21

– Scope of delivery: 180 AFB, 180 AFT-D, 13 mm QuiXS quick-release chuck, 1 x 3.0 Ah battery for maximum range and 1 x 1.5 Ah battery for lowest weight – fits for both tools, CSL 30 LI quick charger with cable depot, belt hook with integrated bit holder, gear protection cap, professional Klick-Box II carrying case (page 41)

Art.-No.: 12 31 0225

The universal compact class

Strong torque with a minimum of weight

2-speed gear



2 years WARRANTY
Lithium Ion
POWER TECHNOLOGY



LED spotlight and battery lamp
LED spotlight and battery lamp for lighting of the working area.



QuiXS
Quick Fix System

QuiXS
QuiXS rapid chuck changing system, for lightning chuck changing, for screwing without a chuck due to the direct support of the screwdriver bit in the spindle or for the use of a QuiXS attachment.



QuiXS angle drilling head
For using the tool as an angle screwdriver. The angle drilling head can be turned through 360° and can thus be adapted to every working position.

Cordless screwdriver

108 AS-2 1,3 SET L 10,8 Volt

- 2-speed gear with high torque in the 1st gear for screwing, high speed in the 2nd gear for drilling
- QuiXS changing system
- Direct support of the screwdriver bit in the spindle
- 12-stage torque setting
- Quick stop for flush screwing
- LED Spotlight
- Scope of delivery: QuiXS quick-release chuck Ø 0.8–10 mm, QuiXS angle attachment, battery lamp, 2 x 1.3 Ah batteries, fast charger, professional carrying case

QuiXS
ASL
2 years WARRANTY
Lithium Ion
POWER TECHNOLOGY



2-speed gear

V/Ah	min	max. Nm	mm	mm	mm	kg
Li-Ion 10,8/1,3	30	28/13	20	10	6	0,9

Art.-No.: 12 15 0211

108 AS 1,3 SET L 10,8 Volt

- Same as 108 AS-2 1,3 Set L, but only 1-speed gear
- Scope of delivery: QuiXS quick-release chuck Ø 8 mm, QuiXS angle attachment, battery lamp, 2 x 1.3 Ah batteries, fast charger, professional carrying case

QuiXS
ASL
2 years WARRANTY
Lithium Ion
POWER TECHNOLOGY



V/Ah	min	max. Nm	mm	mm	mm	kg
Li-Ion 10,8/1,3	30	20 / 6	20	8	6	0,8

Art.-No.: 12 15 0202

Cordless caulking gun

144 KAP 14,4 Volt

- Non-wearing compressed air technology
- Rapid vent valve and pressure control valve for drop-free working
- Extrusion tube for cartridges and sachets
- Battery-operated compressor with a press out power of 1400 N
- Scope of delivery: MSL 50 LI fast charger, 310 ml cartridge tube, professional carrying case

2 years WARRANTY
Lithium Ion
POWER TECHNOLOGY



V/Ah	min	Adequate for cartridges/sachets*	Extrusion tube	Extrusion force N/bar	kg
Li-Ion 14,4 / 2,2	50	62	36	tubo cartuc-cia da 310 ml	1,9

Art.-No.: 12 08 0301

* At optimum working conditions using silicon at 23°C ambient temperature

Top performance at every angle

Highest durability in metal



The metal pro's

Full wave electronics

with speed stabilization ensures a fast working progress and speed pre-selection for appropriate working (1400 WSXE 125).



Slim and ergonomically-designed housing for best handling even in the narrowest areas.



Motor winding protection

Our innovative motor winding protection prevents metal dust damages. Optimal protection even at high dust formation.



1400 WSXE 125 1400 Watt

- Innovative motor winding protection prevents metal dust damages
- Full wave electronics with speed pre-selection and tacho generator
- Re-start protection
- Soft start-up and starting current limitation
- Cut-off carbon brush to protect the motor
- Keyless protection hood adjustment
- Electronic overload protection
- **Scope of delivery: 2-component soft hand grip, face spanner without cutting disc**



NEW

6500...12000	125	22,2	M 14	2,3	4

Comes in a carton

Art.-No.: 06 05 1821

Delivery in a professional Klick-Box II carrying case (page 41)

Art.-No.: 06 05 1822

1100 WSX 125 1100 Watt

- Innovative motor winding protection prevents metal dust damages
- Cut-off carbon brush to protect the motor
- Protective cover can be swivelled without using any tools
- **Scope of delivery: 2-component soft hand grip, face spanner, professional carrying case without cutting disc**



NEW

11000	125	22,2	M 14	2,2	4

Art.-No.: 06 05 1613

1000 WSX 125 1000 Watt

- Innovative motor winding protection prevents metal dust damages
- Protective cover can be swivelled without using any tools
- **Scope of delivery: 2-component soft hand grip, face spanner without cutting disc**



NEW

11000	125	22,2	M 14	2,2	4

Art.-No.: 06 05 1919

750 WS 125 / 750 WS 115 750 Watt

- Short, robust aluminium gear housing
- Cut-off carbon brush to protect the motor
- **Scope of delivery:** 2-component soft hand grip, face spanner without cutting disc



750 WS 125

10500	125	22,2	M 14	1,6	4

750 WS 115

115

Art.-No.: 06 04 4504

Art.-No.: 06 04 4501

2400 WSE/1 230 2400 Watt

- Aluminium die-cast-gear housing
- Starting current limitation for user-friendly switch on
- Special winding protection for the motor
- Cut-off carbon brush to protect the motor
- Service cover for carbon brush change
- **Scope of delivery:** additional handle, face spanner without cutting disc



6500	230	22,2	M 14	6,0	4

Art.-No.: 06 04 6503

2200 WS/1 230 2200 Watt

- Aluminium die-cast gear housing
- Special winding protection for the motor
- Cut-off carbon brush to protect the motor
- Service cover for carbon brush change
- **Scope of delivery:** additional handle, face spanner without cutting disc




6500	230	22,2	M 14	5,4	4

Art.-No.: 06 04 6310



Clean affair

Powerful, accurate, fast and dust-free working

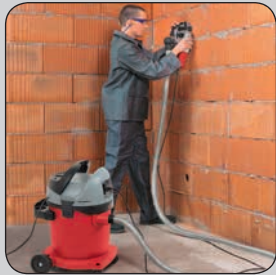

Push and pull cutting
due to swivel-mounted motor.



1400 MSF 140 1400 Watt

- Electronic with speed stabilization
- Push and pull cutting
- Closed protection hood
- Disc change, groove width adjustment and cutting depth adjustment without using any tool
- Plunge cut stop
- **Scope of delivery:** 2 diamond cutting discs Ø 140 mm, quick clamping nut M 14, 3 distance washers, 2 clamping flanges, 1 slot breaker, adaptor for vacuum cleaner, professional carrying case

7500	0...35	140	M 14	10...30	3,7	4

Art.-No.:06 04 7501

SYSTEM SOLUTION

Absolutely dust-free working with optimally harmonized system

1400 MSF 140 Art.-No.: 06 04 7501 + 1400 RS EA Art.-No.: 06 31 0401



A clear thing

Grinding, sucking, clean work



Easy Change

The hook and loop system of all Kress sanding tools enables a fast and easy sanding sheet change.



Healthy working conditions

The integrated extraction system cleans up the dust where it arises. Whether a dust bag or extraction equipment is used, the working environment is always clean.

Orbital sander

300 RSE 300 Watt

- Sanding blade fastening by means of hook and loop system or clamp strap
- Rigid magnesium sanding plate
- Full wave control electronics and speed pre-selection
- Powerful dust extraction
- **Scope of delivery:** K80 hook and loop sanding sheet, dust bag, vacuum cleaner connection, clamp strap, additional handle, professional carrying case

5000...12000	10000...24000	3	114 x 225	115 x 228	2,0	4



Art.-No.:06 02 1811

Eccentric grinder

300 EXE 300 Watt

- Hook and loop abrasive disk fastening system
- Full wave control electronics with speed pre-selection
- High-performance integrated extraction
- 3-point grinding pad attachment for precise circuit
- **Scope of delivery:** K80 hook and loop sanding sheet, dust bag, vacuum cleaner connection, additional handle, professional carrying case

No-load speed	No-load stroke number	5	125	1.8	4
0...14000	0...28000				



Art.-No.: 06 11 0409

Precision is the decisive factor

Sawing and milling with Kress precision tools



Tool change

The saw blade can be changed in a twinkling of an eye. Without additional tools but with the x-mal-click rapid-clamping system.

Precise cuts

With the tool-less saw plate adjustment the saw can be deployed for mitre-cutting at the turn of a hand.

Perfect results

Precision is the decisive factor, especially for professional applications. Our tools can be adjusted precisely to the needs of the user.

Reciprocating saw

1200 SPE 1200 Watt

- Quick keyless saw blade change system
- Full wave electronics and speed pre-selection
- Completely rubberised gear housing
- Keyless adjustable shoe
- Pendulum stroke can be switched on/off
- Scope of delivery: 2 bimetal saw blades, professional carrying case

0...2600	28	300	130	160	4,0	4



Art.-No.: 06 03 8101

Circular saw

1400 HK5 1400 Watt

- Spindle locking mechanism for easy saw blade change
- Aluminium die-cast protection hood
- Quick adjustment cutting depth
- Quick clamping lever for mitre adjustment
- Scope of delivery: carbide-tipped 14 teeth saw blade, parallel guide, additional hand grip, allen key, professional carrying case

4700	190	66	45	335 x 162	4,9	4



Art.-No.: 06 01 2519

Duo-saw

1400 DS DUO-SAW 1400 Watt

- Circular saw and precision chain saw in one appliance
- Automatic chain lubrication and chain saw attachment
- Aluminium die-cast protection hood
- Quick adjustment cutting depth
- Quick clamping lever for mitre adjustment
- Scope of delivery: carbide-tipped 14 teeth saw blade, parallel guide, chain saw attachment, additional hand grip, allen key, chain saw adhesive oil - 100 ml

4700	190	66 / 200	45	335 x 162	4,9 / 5,4	4



Art.-No.: 06 01 2608

650 SPS 650 Watt

- Aluminium die-cast gear housing and saw table
- Quick keyless adjustment of the saw plate
- x-mal-click keyless saw blade change
- Full wave electronics with a tachometer generator and speed pre-selection
- 3 adjustable pendulum stages plus a zero position
- Blowing device
- **Scope of delivery: plastic slide plate, jig saw blade, anti-splinter guard for saw blade and slide plate, professional Klick-Box I carrying case**

500...3200	19	110	6	45	2,3	4



Art.-No.: 06 03 2907

500 STE 500 Watt

- Quick keyless adjustment of the saw plate
- x-mal-click keyless saw blade change
- Full wave control electronics and speed pre-selection
- 2 adjustable pendulum stages plus zero position
- Blowing device
- **Scope of delivery: jig saw blade, anti-splinter guard for saw plate, professional Klick-Box I carrying case**

600...3400	19	80	5	45	1,7	4



Art.-No.: 06 03 3109

1050 FME 1050 Watt

- Steel motor flange with double bearing
- Spindle lock for easy milling tool change
- Full wave electronics with speed pre-selection and tacho generator
- Cut-off carbon brushes to protect the motor
- **Scope of delivery: 8 mm collet**
- Further collets between 3 mm and 8 mm are available (page 47)

10000...29000	8	43	1,7	4



With concentricity certificate

Art.-No.: 06 08 2201

1050 FME-1 1050 Watt

- Steel motor flange with double bearing
- Spindle lock for easy milling tool change
- Full wave electronics with speed pre-selection and tacho generator
- Cut-off carbon brushes to protect the motor
- **Scope of delivery: 8 mm collet**
- Further collets between 3 mm and 8 mm are available (page 47)

5000...25000	8	43	1,7	4



With concentricity certificate

Art.-No.: 06 08 2206

800 FME 800 Watt

- Steel motor flange with double bearing
- Spindle lock for easy milling tool change
- Full wave electronics with speed pre-selection and tacho generator
- Cut-off carbon brushes to protect the motor
- **Scope of delivery: 8 mm collet**
- Further collets between 3 mm and 8 mm are available (page 47)

10000...29000	8	43	1,4	4



With concentricity certificate

Art.-No.: 06 08 2101

530 FM 530 Watt

- Steel motor flange with double bearing
- Spindle lock for easy milling tool change
- Cut-off carbon brushes to protect the motor
- **Scope of delivery: 8 mm collet**
- Further collets between 3 mm and 8 mm are available (page 47)

29000	8	43	1,3	4




With concentricity certificate

Art.-No.: 06 08 2301

1200 NTX EA 1200 Watt

- Automatic switch-on and additional plug socket for parallel operation of vacuum cleaner and electric tool
- Electrical 2-stage switch (650 W / 1200 W)
- Blower
- Parking system for suction tube and cable depot
- 4 filter system for pure exhaust air
- 28 mm hose inner diameter
- **Scope of delivery:** 2.5 m suction hose with mains cable clamps, 2 suction tubes, adjustable floor nozzle, upholstery nozzle, joint nozzle, multi-purpose nozzle, tool adapter, paper filter, wet filter

 mbar	 l/sec	 30L	 kg	 m
210	58	30	8,4	5

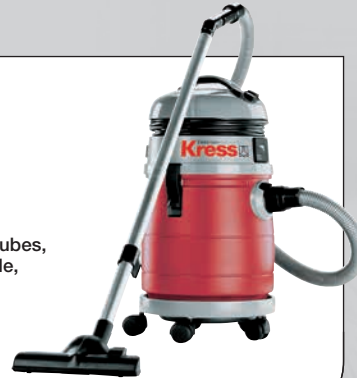

Art.-No.: 06 31 0301

1400 RS EA 1400 Watt

- Automatic filter cleaning through vibration function
- Automatic switch-on and additional plug socket for parallel operation of vacuum cleaner and electric tool
- Electrical on-/off switch with 2 power settings (min/max)
- Overflow protection at wet suction
- Capacity flow display
- Soft start-up
- Prefolded filter cartridge, long (M-category) for respirable dust extraction
- 35 mm hose inner diameter
- **Scope of delivery:** 5 m suction hose, suction tube holder

Optimised for 1400 MSF 140

 mbar	 l/sec	 32L	 kg	 m
248	61	32	10,0	8

* Wall chaser 1400 MSF 140 (page 34)



Art.-No.: 06 31 0401

1400 RS EA SET 1400 Watt

- **Scope of delivery:** prefolded filter polyester, 5 m suction hose, paper filter 22 litre, suction tube holder, 2 high-grade steel tubes, multi-purpose nozzle, joint nozzle, hand grip with additional air slide, rubber sleeve
- For applications with wall chasers the prefolded filter cartridge long (Art.-No. 98 03 9805) is necessary.







Art.-No.: 06 31 0403

Hot air blower

1600 HLG E 1600 Watt

- Electronic temperature control between 80 and 600 °C
- Stationary use by means of the supporting foot
- Heating unit adjustable from 160 to 1600 Watt
- Ceramic heating element for continuous operation

 °C	 l/min	 kg	 m
80...600	400	0,7	4



Art.-No.: 06 09 0128

“The trick with the click”

Always ready to hand



Innovative carrying case system

ensures an easy and convenient transport of up to 3 carrying cases with just one hand



Unproblematic opening of each carrying case

without separating from each other.

PROFESSIONAL KLIKK-BOX II CARRYING CASE

- Tools can be transported in the ergonomically correct position
- Optimal protection of the electric power tools against dust and splash water
- Offer lots of compartments
- Space-saving storage by practical stackability
- Measurements: 470 x 384 x 119 mm
- Material: robust ABS plastics



PNEUMATIC ROTARY HAMMERS, PERCUSSION DRILLS, DRILLS

HAMMER DRILL BITS



SDS-MAX TURBO

12.0 x 200/340 mm X	93 37 7601
12.0 x 400/540 mm X	93 37 7602
14.0 x 200/340 mm X	93 37 7603
14.0 x 400/540 mm X	93 37 7604
16.0 x 200/340 mm O	93 37 7605
16.0 x 400/540 mm O	93 37 7606
18.0 x 200/340 mm O	93 37 7607
18.0 x 400/540 mm O	93 37 7608
20.0 x 200/320 mm O	93 37 7609
20.0 x 400/520 mm O	93 37 7610
22.0 x 400/520 mm O	93 37 7611
24.0 x 400/520 mm O	93 37 7612
25.0 x 400/520 mm O	93 37 7613
28.0 x 450/570 mm O	93 37 7614
30.0 x 450/570 mm O	93 37 7615
32.0 x 450/570 mm O	93 37 7616
35.0 x 450/570 mm O	93 37 7617
38.0 x 450/570 mm O	93 37 7618
40.0 x 450/570 mm O	93 37 7619

X = Double cutting drill O = Four-lipped core drill

SDS-PLUS TURBO

5.0 x 50/110 mm	98 03 5601
5.0 x 100/160 mm	98 03 5602
6.0 x 50/110 mm	98 03 5603
6.0 x 100/160 mm	98 03 5604
6.0 x 150/210 mm	98 03 5605
8.0 x 50/110 mm	98 03 5606
8.0 x 100/160 mm	98 03 5607
8.0 x 150/210 mm	98 03 5608
8.0 x 200/260 mm	98 03 5609
10.0 x 100/160 mm	98 03 5610
10.0 x 150/210 mm	98 03 5611
10.0 x 200/260 mm	98 03 5612
12.0 x 100/160 mm	98 03 5613
12.0 x 150/210 mm	98 03 5614
12.0 x 200/260 mm	98 03 5615
12.0 x 400/450 mm	98 03 5616
14.0 x 150/210 mm	98 03 5617
14.0 x 200/260 mm	98 03 5618
16.0 x 150/210 mm	98 03 5619
16.0 x 250/310 mm	98 03 5620
16.0 x 400/450 mm	98 03 5634
18.0 x 250/300 mm	98 03 5621
18.0 x 400/450 mm	98 03 5622
20.0 x 250/300 mm	98 03 5623
20.0 x 400/450 mm	98 03 5624
22.0 x 400/450 mm	98 03 5625
24.0 x 400/450 mm	98 03 5626
25.0 x 400/450 mm	98 03 5627
26.0 x 400/450 mm	98 03 5628

CHISEL



30 MM HEXAGON CHISEL

Pointed chisel 410 mm hexagon support (Hex 30mm for 1300 ABH)	98 04 0401
Spade chisel 75 x 450 mm (Hex 30 mm for 1300 ABH)	98 04 0402
Flat chisel 35 x 450 mm (Hex 30 mm for 1300 ABH)	98 04 0403

SDS-MAX

400 mm pointed chisel	93 37 7801
25 x 400 mm flat chisel	93 37 7802
50 x 360 mm spade chisel	93 37 7803
300 mm hollow-ground chisel	93 37 7804

SDS-PLUS

Pointed chisel	91 91 8501
Flat chisel	92 36 8401
Spade chisel	92 36 8501
Hollow-ground chisel	98 02 6001
Nail attachment	98 02 0401

CORE CUTTER



SDS-MAX

50 x 100 mm	93 37 7701
65 x 100 mm	93 37 7702
80 x 100 mm	93 37 7703
100 x 100 mm	93 37 7704
180 mm adapter	93 37 7705
450 mm adapter	93 37 7706
Centring drill bit 11 x 120 mm	93 37 7707
Ejector	93 37 7708

SDS-PLUS

40 x 50 mm	93 38 2501
50 x 50 mm	93 38 2502
65 x 50 mm	93 38 2503
80 x 50 mm	93 38 2504
105 mm adapter	93 38 2505
220 mm adapter	93 38 2506
Centring drill bit 8 x 120 mm	93 38 2507

DRILL BIT BOX

SDS PLUS TURBO

BK 5 5-piece set (5,6,8,10,12 x 100/160)	93 30 4001
--	------------

OTHER ACCESSORIES

Accessories carrying case Klick-Box II ZBK 62

62-pieces (Bit box 32-pieces, 19-pieces HSS metal drill bit set, 5-pieces universal drill bit set, SDS-plus hammer drill bit set 5-pieces, pocket rule 2 m) 98 04 4401

Accessories carrying case Klick-Box I ZBK 50

50-pieces (Bit box 32-pieces, 9-pieces HSS metal drill bit set, 4-pieces stone drill bit set, water level, protective goggles, pocket rule 2 m, carpenter's pencil, consumables box incl. 68-pieces dowel set) 98 04 4402

Straight shank drill bit

19-pieces HSS metal drill bit set (1 - 10 mm; + 0.5 mm) 98 04 4201

5-pieces universal drill bit set (4, 5, 6, 8, 10 mm) 98 04 4202

Drill bits

32-pieces bit box (PH 1 - 3, PZ 1 - 3, T 15 - 40) 98 04 1903

RZ 13 F toothed chuck 13 mm with key, 1/2" x 20 UNF holder, 94 52 5001

suitable for 850 SB-2 / 650 SBLR-1 / 550 SBLR-1 / 1055 HTC

RZ 10 S drill chuck key 10 + 13 mm 94 51 9701

QuiXS quick-release chuck RV 13 mm

suitable for 850 BM-2 / 180 AFB / 144 AFB / 650 BS QuiXS 98 04 1001

QuiXS-socket wrench attachment 1/2" external square

suitable for 850 BM-2 / 180 AFB / 144 AFB 98 04 1204

Quick-release chuck 13 mm, 1/2-20 UNF-3B impact resistant, with HM-clamping jaws

suitable for 850 SB-2 / 650 SBLR-1 / 550 SBLR-1 / 1055 HTC

and all Kress SDS-Plus pneumatic hammers in connection with PX holding shaft 98 02 7101

QuiXS-SDS-plus chuck

suitable for 360 BPS BiPower / 800 PSE QuiXS-Set 98 04 1501

QuiXS-Quick-release chuck 13 mm

suitable for 360 BPS BiPower / 800 PSE QuiXS-Set 98 04 1502

PX holding shaft for chuck (connection thread 1/2" x 20 UNF) for normal drilling

with a chuck and as direct holder for 1/4" screwdriver bits 98 02 9801

Drill bit grease, tube 50 ml 98 03 5301



DRYWALL SCREWDRIVER

SCREWBITS SUITABLE FOR TBS WITH SMV QUIXS

Bit 1/4" Hexagon TBS Form H/Phillips size 2 (3 pcs.) 98 04 0302

Bit 1/4" Hexagon TBS Form Z/Pozidrive size 2 (3 pcs.) 98 04 0303

BELTED DRY WALL SCREWS

(20 BANDS À 50 PCS.) SUITABLE FOR SMV QUIXS

Dry wall screws 3.9 x 25 PH 2 / fine thread 98 04 0304

Dry wall screws 3.9 x 25 PH 2 / coarse thread 98 04 0305

Dry wall screws 3.9 x 35 PH 2 / fine thread 98 04 0306

Dry wall screws 3.9 x 35 PH 2 / coarse thread 98 04 0307

Dry wall screws 3.9 x 45 PH 2 / fine thread 98 04 0308

Dry wall screws 3.9 x 45 PH 2 / coarse thread 98 04 0309



CORDLESS TOOLS

IMPACT-RESISTANT TOOLS

System box impact-resistant nut 1/2" square 38 mm long, SW 10, 13, 17, 19 mm	98 04 4001
System box impact-resistant Torx Bits 1/4" 50 mm long, 4x T40, 4x T30, 2x T25	98 04 4002



REPLACEMENT TUBES FOR CORDLESS CAULKING GUNS

KR 310 cartridge tube 310 ml	98 03 3101
SR 400 sachet 400 ml	98 03 3201
SR 600 sachet 600 ml	98 03 3301
KRS 310 cartridge tube with push rod 310 ml	98 03 3501




OTHER ACCESSORIES

Accessories carrying case Klick-Box II ZBK 62 62-pieces (Bit box 32-pieces, 19-pieces HSS metal drill bit set, 5-pieces universal drill bit set, SDS-plus hammer drill bit set 5-pieces, pocket rule 2 m)	98 04 4401
---	------------

Accessories carrying case Klick-Box I ZBK 50 50-pieces (Bit box 32-pieces, 9-pieces HSS metal drill bit set, 4-pieces stone drill bit set, water level, protective goggles, pocket rule 2 m, carpenter's pencil, consumables box incl. 68-pieces dowel set)	98 04 4402
---	------------

Straight shank drill bit 19-pieces HSS metal drill bit set (1 – 10 mm; + 0.5 mm)	98 04 4201
5-pieces universal drill bit set (4, 5, 6, 8, 10 mm)	98 04 4202
32-pieces bit box	98 04 1903

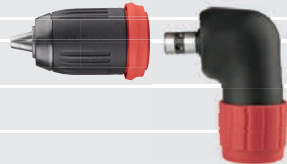

QuiXS Quick-release chuck RV 13 mm suitable for 180 AFB / 144 AFB / 850 BM-2 / 650 BS QuiXS	98 04 1001
---	------------

QuiXS angle drilling head AFB / AS suitable for 180 AFB / 144 AFB / 108 AS / 108 AS-2	98 04 1201
---	------------

QuiXS socket wrench attachment 1/2" external square suitable for 180 AFB / 144 AFB / 850 BM-2	98 04 1204
---	------------

Belt hook AF suitable for 180 AFB / 144 AFB / 180 ATBS / 180 AFT	98 04 1301
--	------------

SPARE BATTERIES

APF 360/3.5	36 V / 3.5 Ah Li-Ion – for 360 BPS BiPower	98 04 4502
APF 180/3.0	18 V/3.0 Ah Li-Ion – for 180 AFT / 180 ATBS / 180 AFB	98 04 0603
APF 180/1.5	18 V/1.5 Ah Li-Ion – for 180 AFB / 180 AFT / 180 ATBS	98 04 0801
APF 144/3.0	14.4 V/3.0 Ah Li-Ion – for 144 AFB	98 04 0702
APF 144/1.5	14.4 V/1.5 Ah Li-Ion – for 144 AFB	98 04 0901
A 144	14.4 V/2.2 Ah Li-Ion – for 144 KAP	98 03 9901

WALL CHASER

Diamond cutting disc, Profi Cut	98 04 2401
---------------------------------	------------




GRINDERS / SANDERS

ANGLE GRINDERS

PROTECTION HOODS

Protection hood 230-1 – for 2200 WS/1 230 / 2400 WSE/1 230	98 04 2002
Protection hood 230-2 – for 2600 WSB/1 230 / 2600 WS/1 230	98 04 2201
Protection hood 125-1 – for 1400 WSE/1 125 / 1100 WS/1 125 / 1000 WS/1 125	98 04 2101
Protection hood 125-3 – for 750 WS 125	98 04 3401
Protection hood 115-1 – for 750 WS 115	98 04 2003



OTHER ACCESSORIES


Grinding disc Ø 115 mm and 125 mm	
FIXTEC rapid clamping flange nut	98 03 5801
Clamping flange Ø 30 mm cpl.	98 02 1301



ECCENTRIC GRINDERS

ACCESSORIES FOR SANDING SHEETS Ø 125 MM FOR 300 RXE


Grinding plate, soft	98 02 0101
Grinding plate, hard	98 02 0301
Hook and loop abrasive sheets CORUNDUM	
K 40 (5 pcs.)	98 01 9301
K 60 (5 pcs.)	98 02 2501
K 80 (5 pcs.)	98 01 9401
K 120 (5 pcs.)	98 01 9501
K 180 (5 pcs.)	98 02 2601
K 240 (5 pcs.)	98 01 9601
Polishing sponge (1 piece) self-adhesive, for refurbishing	98 01 9001
Polishing hood (3 pieces) self-adhesive, for giving a mirror finish	98 01 9101

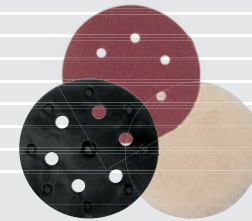

ORBITAL SANDER

HOOK AND LOOP ABRASIVE SHEETS 228 X 115 MM, PERFORATED FOR 300 RSE

Assortment consisting of grain 60/80/120 10 pcs., assorted	92 52 1101
K 60 (5 pcs.)	92 77 7101
K 80 (5 pcs.)	92 77 7201
K 120 (5 pcs.)	92 77 7301
K 180 (5 pcs.)	92 77 7302
K 240 (5 pcs.)	92 77 7303



OTHER ACCESSORIES

Dust bag for 300 RSE	98 02 6801
Suction connection to connect vacuum cleaner with rubber mantle for various hose-Ø	98 02 1001

SAWING

RECIPROCATING SAW



SSB 1022 VF Universal metal (5 pcs.) Length 200 mm, blade thickness 0.9 mm, TPI* 10–14, tooth pitch 1.8–2.6 mm, for wood with nails (5–175 mm), sheet metal, aluminium profile (3–10 mm), plastic profile (3–175 mm)	98 04 1601
SSB 1022 BF Metal (5 pcs.) Length 200 mm, blade thickness 0.9 mm, TPI* 14, tooth pitch 1.8 mm, for strong sheet metals (3–8 mm), tubes and profiles (10–175 mm), for fast cutting performance	98 04 1602
SSB 922 BF Metal (5 pcs.) Length 150 mm, blade thickness 0.9 mm, TPI* 14, tooth pitch 1.8 mm, for strong sheet metals (3–8 mm), tubes and profiles (10–100 mm), for fast cutting performance	98 04 1603
SSB 3456 XF Universal (5 pcs.) Length 200 mm, blade thickness 1.25 mm, TPI* 6–12, tooth pitch 2.1–4.3 mm, for wood with nails / metal, chipboard (5–150 mm), Metal / Aluminium profile (3–18 mm), plastics (5–150 mm)	98 04 1604
SSB 1111 VF Universal wood (5 pcs.) Length 225 mm, blade thickness 1.25 mm, TPI* 8–5, tooth pitch 3–5 mm, for wood with nails / metal, chipboard (10–175 mm), plastic profile (8–50mm)	98 04 1605

* TPI – Tooth per inch

CIRCULAR SAW / DUO SAW



Circular saw blades, carbide tipped (HM) for wood glued with synthetic resin, plastic coated wood for 1400 HKS, 1400 DS	
14 teeth HM 190 x 20.0 mm	91 49 2401
32 teeth HM 190 x 20.0 mm	98 03 4601
48 teeth HM 190 x 20.0 mm	91 51 9401

OTHER ACCESSORIES

Guide rule FL 1560 incl. 2 screw clamps, Length 1.5 metre	98 02 5702
Connecting strip for guide rule	98 02 5801
Spare chain for 1400 DS Duo saw, Model 91 S-36 E, 3/8" with 36 driving links	98 01 7301

JIG SAWS



JIG SAW BLADES

T 144 D (3 pcs.) – ground, cross-set, tooth pitch 4 mm, for soft and hard wood up to 75 mm, rough cut, large cutting performance, for curved cutting	92 80 5401
T 301 CD (3 pcs.) – ground, draft angle grinding, tooth pitch 3 mm, for soft and hard wood up to 75 mm, for plastics, clear cuts, large cutting performance	92 80 5501
T 101 BF (3 pcs.) – ground, draft angle grinding, tooth pitch 2.5 mm, for soft and hard wood, for plastics, perspex, coated slab, clear and straight cuts, long service life	92 80 5601
T 118 B (3 pcs.) – milled, curved, tooth pitch 2 mm, for soft steel up to 6 mm, aluminium, non-ferrous heavy metal, (use of cooling lubricants)	92 80 5701
T 118 A (3 pcs.) – milled, curved, tooth pitch 1.2 mm, for soft steel, non-ferrous heavy metal, aluminium, sheet metal up to 4 mm, for curved cutting, (use of cooling lubricants)	92 80 5801

OTHER ACCESSORIES


Anti-splinter guard (3 pcs.)	98 02 1101
------------------------------	------------

MILLING

MILLING MOTORS

COLLETS INCL. CLAMPING NUT

Ø 3 mm	– for 1050 FME / 1050 FME-1 / 800 FME, 530 FM	98 04 0101
Ø 3.175 mm	– for 1050 FME / 1050 FME-1 / 800 FME, 530 FM	98 04 0102
Ø 4 mm	– for 1050 FME / 1050 FME-1 / 800 FME, 530 FM	98 04 0103
Ø 6 mm	– for 1050 FME / 1050 FME-1 / 800 FME, 530 FM	91 43 4601
Ø 6.35 mm	– for 1050 FME / 1050 FME-1 / 800 FME, 530 FM	91 47 7101
Ø 8 mm	– for 1050 FME / 1050 FME-1 / 800 FME, 530 FM	91 48 2001



OTHER ACCESSORIES

Table holding device Ø 43 mm	– for 1050 FME / 1050 FME-1 / 800 FME / 530 FM	98 04 0502
Flexible shaft	– for 1050 FME / 1050 FME-1 / 800 FME	98 04 0501
Collet Ø 6 mm	– for flexible shaft	98 04 0503
Collet Ø 6.35 mm	– for flexible shaft	98 04 0504
Collet Ø 8 mm	– for flexible shaft	98 04 0505



SUCTION

WET/ DRY VACUUM CLEANERS

Filter bag for 1200 NTX EA, 5 pcs.	98 03 8301
Filter bag for 1400 RS EA, 5 pcs.	98 03 9801
Prefolded filter Polyester for 1200 NTX	98 04 3501
Prefolded filter Polyester for 1400 RS EA	98 03 9802
Prefolded filter, long, for 1400 RS EA in particular for extraction with a wall chaser	98 03 9805
Rubber sleeve Ø 35 mm for 1400 RS EA	98 03 9804
Cleaning set 1400 RS EA consisting of: 2 x high-grade steel tube, 1 x multi-purpose nozzle, 1 x joint nozzle, 1 x hand grip with additional air slide	98 03 9803



OTHER ACCESSORIES

MAINS CABLE WITH PATENTED QUICK-ACTION LOCK

4 metre rubber lead	98 02 6901
6 metre rubber lead	98 02 7001



CARRYING CASES

Universal plastic carrying case suitable for the following machines: 2400 WSE/1 230 / 2200 WS/1 230	98 03 9601
Carrying case 108 AS (incl. inlay) suitable for the following machines: 108 AS-2 1.3 Set L / 108 AS 1.3 Set L	98 04 4101
Carrying case PLASTON ABS pneumatic hammer P (incl. inlay) suitable for the following machines: 700 PEC / 1055 HTC	98 04 0202
Carrying case Klick-Box II 360 BPS BiPower (incl. inlay) ABS suitable for the following machine: 360 BPS BiPower	98 04 3807
Carrying case Klick-Box II ALK 360 (incl. inlay) ABS suitable for the following machine: ALK 360 battery and charger kit	98 04 3808
Carrying case Klick-Box II Drilling tools spade form (incl. inlay) ABS suitable for the following machines: 800 PSE / 800 PSE QuiXS-set / 700 PSE	98 04 3801
Carrying case Klick-Box II 800 PPE (incl. inlay) ABS suitable for the following machine: 800 PPE	98 04 3806
Carrying case Klick-Box II ATBS (incl. inlay) ABS suitable for the following machine: 180 ATBS	98 04 3803
Carrying case Klick-Box II Cordless screwdrivers (incl. inlay) ABS suitable for the following machines: 180 AFT / 180 AFB / 144 AFB	98 04 3802
Carrying case Klick-Box II AFB / AFT Combo (incl. insert) ABS fitting for the following machines: 180 AFB/AFT-W 3.0/1.5 Combo / 180 AFB/AFT-D 3.0/1.5 Combo	98 04 3809
Carrying case Klick-Box II AFB / ATBS Combo (incl. inlay) ABS suitable for the following machine: 180 AFB/ATBS 3.0/1.5 Combo	98 04 3810
Carrying case Klick-Box II Drilling tools pistol form (incl. inlay) ABS suitable for the following machines: 550 HMSL / 850 SB-2 / 850 BM-2	98 04 3805
Carrying case Klick-Box II angle grinder (incl. inlay) ABS suitable for the following machines: 1400 WSXE 125 / 1100 WSX 125 / 1000 WSX 125 / 750 WS	98 04 3804
Carrying case Klick-Box I PP drilling suitable for the following machines: 650 SBLR-1 / 550 SBLR-1	98 03 8403
Carrying case Klick-Box I PP AF 1.5 suitable for the following machines: 180 AFB 1.5 / 144 AFB 1.5 / 180 AFT-D 1.5 / 180 AFT-W 1.5	98 03 8407
Carrying case Klick-Box I Drill / drywall screwdriver (incl. inlay) suitable for the following machines: 650 BS QuiXS / 650 TBS 6000 / 650 TBS 4500 / 650 TBS 2500	98 03 8408
Carrying case Klick-Box I PP jig saws (incl. inlay) suitable for the following machines: 650 SPS / 500 ST E	98 03 8405



All Klick-Box carrying cases can be connected with the click system.

Speed rpm	Speed 1st gear for screwing rpm	Speed 2nd gear for drilling rpm	Number of impacts Impacts per minute
Drive screw Max. torque Newton metre	Screwing soft Max. torque Newton metre	Screwing hard Max. torque Newton metre	Joule Impact energy chiselling In joule
Drilling performance in wood Ø in mm	Drilling performance in steel Ø in mm	Drilling performance core cutter in masonry Ø in mm	Drilling performance solid drill bit in concrete Ø in mm
Steel anchor Ø in mm	Screwing in wood Ø in mm	Metric screws M6 – M12	
Screw spacing in mm	Screw length in mm	Screw diameter Ø in mm	Screw head diameter Ø in mm
Grinding disc Ø in mm	Disc fixing hole Ø in mm	Work spindle thread M 14	Oscillating circuit Strokes per minute
Sanding sheet Width x Length in mm	Sanding disc Width x Length in mm	Sanding disc Ø in mm	Oscillating circuit Ø in mm



Cutting depth
Max. in mm



Groove width
Max. in mm



Cutting depth in wood
Max. in mm



Standard stroke range
Stroke per minute



Length of stroke
in mm




Mitre cut adjustment
Max. in degree



Saw blade
Ø in mm




Cutting depth in wood
Max. in mm




Cutting depth in metal
Max. in mm



Cutting depth in PVC
Max. in mm



Collet
Ø in mm



Collar
Ø in mm



Negative pressure
in mbar



Air flow
in litres per seconde



Container volume
in litres



Temperature area
in degree Celsius




Ventilation system performance
Litres per minute




Cable
Length in m



Cable with patented quick-action lock
Length in m



Battery
Volts/Ah



Battery
Scope of delivery



Battery charging time
in minutes



Weight
in kg



Direction of rotation
Reversible function

Dealer Belgium

ALB fasteners bvba

Esserstraat 15
B-8550 Zwevegem
Phone : +32 (0)56771981
Fax : +32 (0)56771982
info@alb.be
www.alb.be

Head office

GERMANY
KRESS-elektrik GmbH & Co. KG
Hechinger Straße 48
D-72406 Bisingen
Phone: +49 (0) 74 76 / 8 73 00
Fax: +49 (0) 74 76 / 8 71 91
info@kress-elektrik.de
www.kress-elektrik.com

Subsidiary

FRANCE
KRESS France SARL
ZAC Espale
1, avenue Pierre Pflimlin
F-68390 Sausheim
Phone: +33 (0) 3 89 31 70 60
Fax: +33 (0) 3 89 31 70 69
contact@kressfrance.fr
www.kressfrance.fr

RUSSIA
OOO KRESS TOOLS
Dmitrovskoye Shosse 9A,
building 1
127434 Moscow
Russia
Phone: +7 495 988 57 02
Fax: +7 495 988 57 03
nelyubin@kress-tools.com
www.kress-tools.com

SWITZERLAND
CEKA Elektrowerkzeuge AG
& Co. KG
Industriestrasse 2
CH-9630 Wattwil
Phone: +41 (0) 71 987 40 40
Fax: +41 (0) 71 987 40 41
info@kress-elektrik.ch
www.kress-elektrik.ch